


The Bignall Group of Companies

Product Information Sheet

RA90X/RA90XT

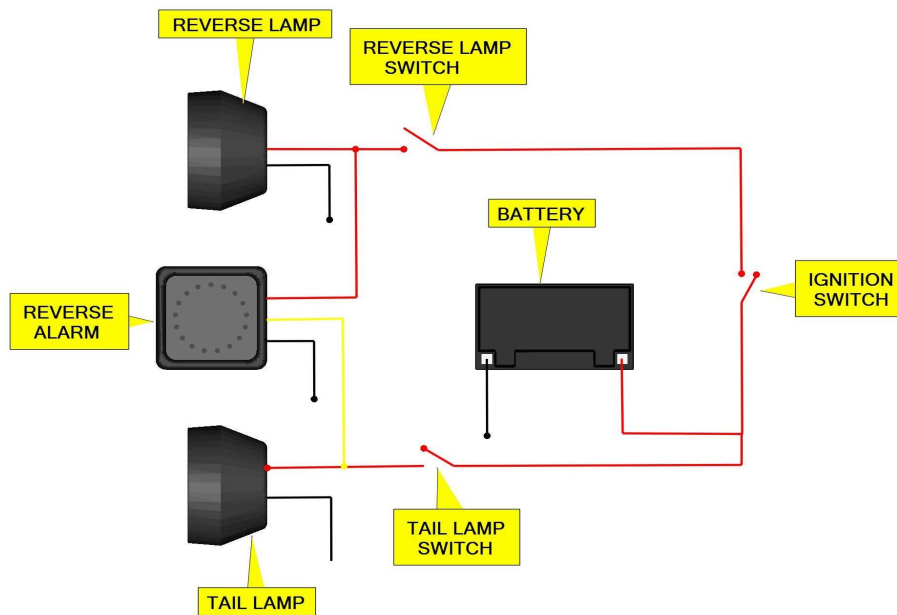

MOUNTING

- Screw fixing stud into rear captive socket until locked, taking care not to over tighten
- Drill 1/4" hole on suitable mounting surface (do not mount where water will stand in speaker) secure unit with fixings provided. Brackets can be provided should direct mounting prove unsuitable.

WIRING

- With Reversing Lamp
- Ground black lead, connect red lead to reversing lamp supply.
- Without Reversing Lamp
- Ground black lead, take red lead to purpose mounted gearbox, or instrument panel switch. Connect other side of switch to fused Ignition controlled supply.
- Night silent Facility.
- Ground black lead, connect red lead to reversing lamp or switched supply, connect yellow lead to tail Lamp or number plate lamp supply.
- Double pole
- Observe polarity and connect both red and black leads to appropriate reversing lamp supply lines.



Unit 15, Dabble Duck Ind. Est.
Shildon
Co. Durham
UK